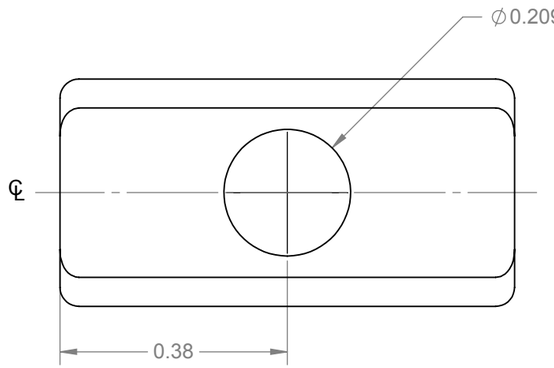



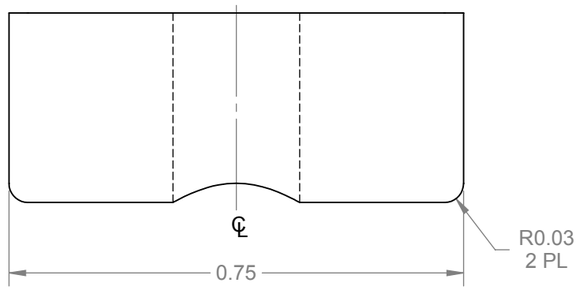

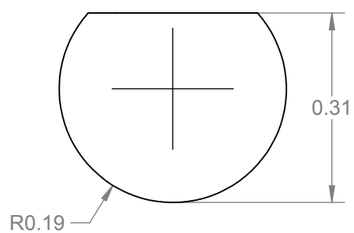

D5351-1 T-BOLT SPACER

NOTES:
1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM ROUND BAR
PER QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
OR QQ-A-200/8 OR AMS-QQ-Q-200/8 (OR AMS 4160)
OR ASTM B211 OR ASTM B221
REF. DART SPEC M6061T6R
2) FINISH: ANODIZE DYED BLACK PER MIL-A-8625F TYPE I OR IB OR IC OR II OR IIB CLASS 2
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY PER QSI 044 6.7
7) WEIGHT: 0.01 lbs

PRELIMINARY ISSUE

REV.	DESCRIPTION	BY	DATE
A	NEW ISSUE	RF	15.08.10

DESIGN	RF	**DART AEROSPACE LTD** HAWKESBURY, ONTARIO, CANADA
DRAWN	RF	
CHECKED	VS	DRAWING NO. D5351 REV. A3
MFG. APPR.	JLM	SHEET 1 OF 1
APPROVED		TITLE T-BOLT SPACER SCALE NTS
DE APPR.		
DATE	15.08.10	

COPYRIGHT © 2015 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.